


BENETECH® Wearliner & Skirting Quote Request



Customer:
Location/Plant:
Belt Name/Number:
Belt Width:
Material(s) Handled:
Conveyor Structure: <input type="radio"/> Channel Frame <input type="radio"/> Truss Frame

Trough Angle: <input type="radio"/> 20° <input type="radio"/> 35° <input type="radio"/> 45° <input type="radio"/> Other:
Belt Incline Angle:
Transition Distance:
Belt Speed:
Belt Tonnage:
Conveyor Base: <input type="radio"/> Standard <input type="radio"/> Wide Base

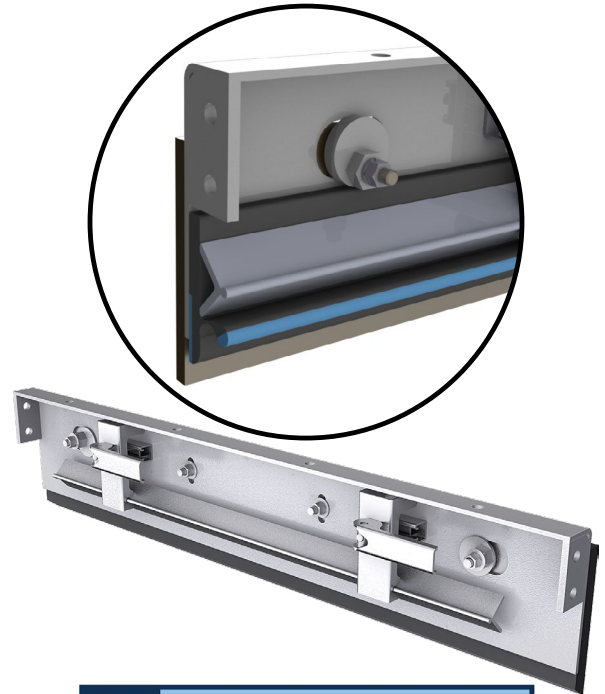


Wearliner & Belt Skirting	
Length of Conveyor to Seal (Linear Feet):	
Liner Material:	<input type="checkbox"/> AR400 <input type="checkbox"/> Other, please specify:
Seal:	<input type="radio"/> B <input type="radio"/> B+ <input type="radio"/> Classic Plus <input type="radio"/> Other, please specify:

Contact Information for Quote
Name:
Company:
Branch Location:
Phone:
Email:

Xternal Access:
Easy maintenance & replacement

Nternal Wearliner:
Protects chute wall & sealing system

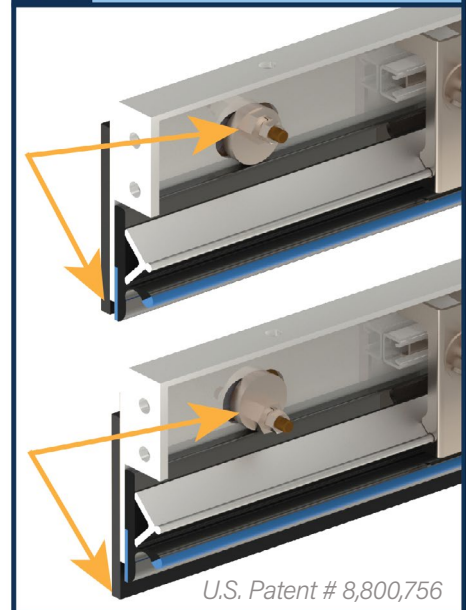

Adjust liner in three easy steps:

1. Loosen four liner bolts
2. Turn cams until desired height off belt is met
3. Re-tighten bolts